

Pull Handle Butterfly Valve Lockout

Design

- Locks out pull handle valves in any desired position
- Convenient, single-piece application to secure valve handles
- Accepts up to 4 padlocks for multiple worker safety
- Fits all standard pull handle valves from 0.5" to 8" diameter.
- Effective in environments where hygiene is critical, including food and beverage, water utilities, chemical and pharmaceutical

Material

- Acrylonitrile butadiene styrene (ABS)
- Housing Color: Red
- UL Rating: UL 94 – HB

Temperature Range

- ABS: -40° to 100°C (-40° to 212°F)

Chemical Resistance

All approved chemicals listed are based on the manufacturer's specified chemical resistance chart.


Dimensions

List dimensions with appropriate labels:

"A"	-	8.56" [217.5 mm]
"B"	-	2.12" [53.8 mm]
"C"	-	3.82" [97.1 mm]



Chemical	°C	Chemical	°C
Acetone	25	Petroleum	25
Acetone	60	Turpentine oil	25
Chlorine, chlorine water	25	Turpentine substitute (white spirit)	25
Fuel, engine: Gasoline (normal & premium grade)	85	Trichloroethane 1,1,1	45
Lubrication oil: gear oil	< 120	Lubricating oil: HD engine oils, hydraulic oils, transformer oils	< 120
Fuel, engine: M15 mixture (15% methanol)	70	Water (including seawater)	25
Methanol	25	etc.	xx

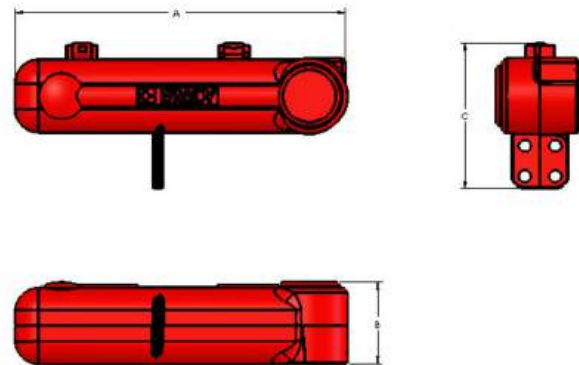

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by Brady customers for designs and specifications, or be relied on as meeting specified performance criteria. Customers desiring to develop