
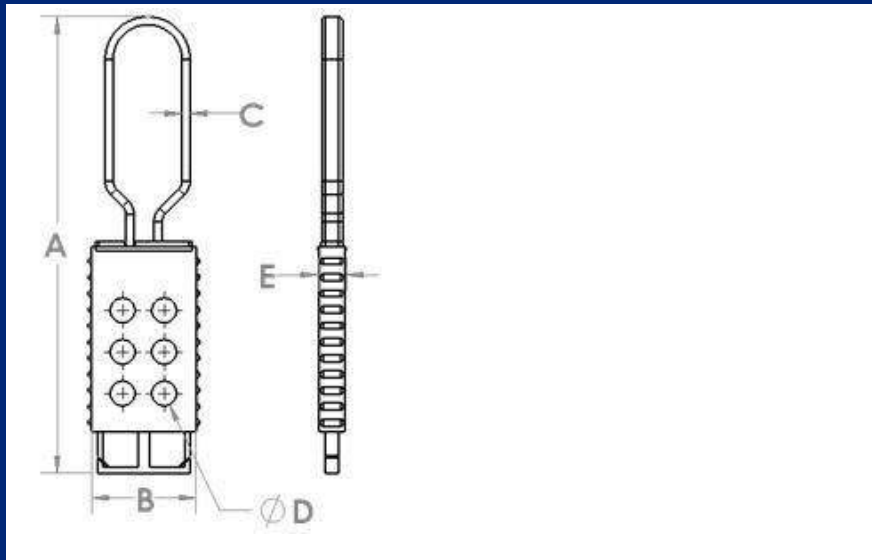


Non-Conductive Nylon Group Lockout Hasp

TDS No. LOTO-35
Effective Date: 10/10/2017

Description:

<p>Design</p> <ul style="list-style-type: none"> • Non-conductive nylon hasps accommodate up to 6 locks • Withstands up to 1,000 pounds, yet weighs only 1 ounce 																																				
<p>Material</p> <ul style="list-style-type: none"> • Hasp and Locking slide: Nylon <ul style="list-style-type: none"> ○ Color: Orange (PMS 167C) 	<table border="1"> <thead> <tr> <th>Chemical</th> <th>°C</th> <th>Chemical</th> <th>°C</th> </tr> </thead> <tbody> <tr> <td>Acetone</td> <td>25</td> <td>Petroleum</td> <td>25</td> </tr> <tr> <td>Acetone</td> <td>60</td> <td>Turpentine oil</td> <td>25</td> </tr> <tr> <td>Chlorine, chlorine water</td> <td>25</td> <td>Turpentine substitute (white spirit)</td> <td>25</td> </tr> <tr> <td>Fuel, engine: Gasoline (normal & premium grade)</td> <td>85</td> <td>Trichloroethane 1,1,1</td> <td>45</td> </tr> <tr> <td>Lubrication oil: gear oil</td> <td>< 120</td> <td>Lubricating oil: HD engine oils, hydraulic oils, transformer oils</td> <td>< 120</td> </tr> <tr> <td>Fuel, engine: M15 mixture (15% methanol)</td> <td>70</td> <td>Water (including seawater)</td> <td>25</td> </tr> <tr> <td>Methanol</td> <td>25</td> <td>Water (including seawater), chlorinated (<0,5 mg/l)</td> <td>80</td> </tr> </tbody> </table>				Chemical	°C	Chemical	°C	Acetone	25	Petroleum	25	Acetone	60	Turpentine oil	25	Chlorine, chlorine water	25	Turpentine substitute (white spirit)	25	Fuel, engine: Gasoline (normal & premium grade)	85	Trichloroethane 1,1,1	45	Lubrication oil: gear oil	< 120	Lubricating oil: HD engine oils, hydraulic oils, transformer oils	< 120	Fuel, engine: M15 mixture (15% methanol)	70	Water (including seawater)	25	Methanol	25	Water (including seawater), chlorinated (<0,5 mg/l)	80
Chemical	°C	Chemical	°C																																	
Acetone	25	Petroleum	25																																	
Acetone	60	Turpentine oil	25																																	
Chlorine, chlorine water	25	Turpentine substitute (white spirit)	25																																	
Fuel, engine: Gasoline (normal & premium grade)	85	Trichloroethane 1,1,1	45																																	
Lubrication oil: gear oil	< 120	Lubricating oil: HD engine oils, hydraulic oils, transformer oils	< 120																																	
Fuel, engine: M15 mixture (15% methanol)	70	Water (including seawater)	25																																	
Methanol	25	Water (including seawater), chlorinated (<0,5 mg/l)	80																																	
<p>Temperature Range</p> <ul style="list-style-type: none"> • Temperature Rating for Nylon: -20°F to 275°F (-30°C to 135°C) 																																				
<p>Chemical Resistance</p> <p>All approved chemicals listed are based on the manufactures specified chemical resistance chart for plastic material only.</p>	<table border="1"> <thead> <tr> <th>Dimension</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>"A"</td> <td>7.008"[178mm]</td> </tr> <tr> <td>"B"</td> <td>1.604"[40.75mm]</td> </tr> <tr> <td>"C"</td> <td>0.122"[3.11mm]</td> </tr> <tr> <td>"D"</td> <td>0.378"[9.6mm]</td> </tr> <tr> <td>"E"</td> <td>0.433"[11mm]</td> </tr> </tbody> </table>				Dimension	Value	"A"	7.008"[178mm]	"B"	1.604"[40.75mm]	"C"	0.122"[3.11mm]	"D"	0.378"[9.6mm]	"E"	0.433"[11mm]																				
Dimension	Value																																			
"A"	7.008"[178mm]																																			
"B"	1.604"[40.75mm]																																			
"C"	0.122"[3.11mm]																																			
"D"	0.378"[9.6mm]																																			
"E"	0.433"[11mm]																																			

Warranty

Note: All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by Brady customers for designs and specifications, or be relied on as meeting specified performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact Brady for further information.