
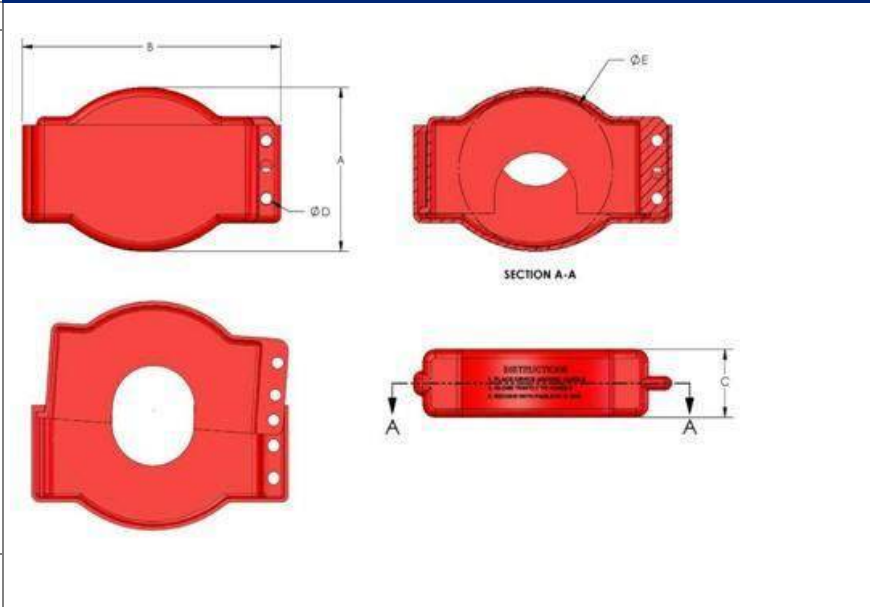


**Adjustable Gate Valve Lockouts**

TDS No. LOTO-70  
Effective Date: 10/16/2017

**Description:**

<p><b>Design</b></p> <ul style="list-style-type: none"> <li>Versatile lockout device that can adjust to fit 1" to 6.5" valve handles, replacing 3 conventional gate valve lockouts</li> <li>Made of durable polypropylene</li> <li>Compact for easy carrying and storage, and comes with danger labels in English, Spanish and French</li> </ul>																												
<p><b>Material</b></p> <ul style="list-style-type: none"> <li>Made of Polypropylene</li> <li>Color: Red (PMS 1805C)</li> <li>UL Rating: UL 94 - HB</li> </ul>	<table border="1"> <thead> <tr> <th>Chemical</th> <th>°C</th> <th>Chemical</th> <th>°C</th> </tr> </thead> <tbody> <tr> <td>Acetone</td> <td>25</td> <td>Petroleum</td> <td>25</td> </tr> <tr> <td>Acetone</td> <td>60</td> <td>Lubricating oil: HD engine oils, hydraulic oils, transformer oils</td> <td>&lt; 120</td> </tr> <tr> <td>Lubrication oil: gear oil</td> <td>&lt; 120</td> <td></td> <td></td> </tr> <tr> <td>Fuel, engine: M15 mixture (15% methanol)</td> <td>70</td> <td>Water (including seawater)</td> <td>25</td> </tr> <tr> <td>Methanol</td> <td>25</td> <td>Water (including seawater), chlorinated (&lt;0,5 mg/l)</td> <td>80</td> </tr> </tbody> </table>				Chemical	°C	Chemical	°C	Acetone	25	Petroleum	25	Acetone	60	Lubricating oil: HD engine oils, hydraulic oils, transformer oils	< 120	Lubrication oil: gear oil	< 120			Fuel, engine: M15 mixture (15% methanol)	70	Water (including seawater)	25	Methanol	25	Water (including seawater), chlorinated (<0,5 mg/l)	80
Chemical	°C	Chemical	°C																									
Acetone	25	Petroleum	25																									
Acetone	60	Lubricating oil: HD engine oils, hydraulic oils, transformer oils	< 120																									
Lubrication oil: gear oil	< 120																											
Fuel, engine: M15 mixture (15% methanol)	70	Water (including seawater)	25																									
Methanol	25	Water (including seawater), chlorinated (<0,5 mg/l)	80																									
<p><b>Temperature Range</b></p> <ul style="list-style-type: none"> <li>Polypropylene: -20° to 80°C (0° to 175°F)</li> </ul>	<p><b>Chemical Resistance</b></p> <p>All approved chemicals listed are based on the manufactures specified chemical resistance chart for plastic material only. All other materials in the device are made of steel.</p> <p><b>Dimensions</b></p> <table border="1"> <tr><td>A</td><td>-</td><td>5.12" [130mm]</td></tr> <tr><td>B</td><td>-</td><td>8.23" [209mm]</td></tr> <tr><td>C</td><td>-</td><td>2.13" [54.1mm]</td></tr> <tr><td>D</td><td>-</td><td>0.37" [9.4mm]</td></tr> <tr><td>E</td><td>-</td><td>6.68" MAX [170mm MAX]</td></tr> </table> <p><b>Note:</b></p> <ul style="list-style-type: none"> <li>E" is the maximum valve handle size, Section A-A shows device at Minimum configuration.</li> <li>Dimensions listed first in the table above are in inches and dimensions listed second are in millimeters.</li> </ul> 				A	-	5.12" [130mm]	B	-	8.23" [209mm]	C	-	2.13" [54.1mm]	D	-	0.37" [9.4mm]	E	-	6.68" MAX [170mm MAX]									
A	-	5.12" [130mm]																										
B	-	8.23" [209mm]																										
C	-	2.13" [54.1mm]																										
D	-	0.37" [9.4mm]																										
E	-	6.68" MAX [170mm MAX]																										

**Warranty**

**Note:** All values shown are averages and should not be used for specification purposes. Test data and test results contained in this document are for general information only and shall not be relied upon by Brady customers for designs and specifications, or be relied on as meeting specified performance criteria. Customers desiring to develop specifications or performance criteria for specific product applications should contact Brady for further information.

Product compliance information is based upon information provided by suppliers of the raw materials used by Brady to manufacture this product or based on results of testing using recognized analytical methods performed by a third party, independent laboratory. As such, Brady makes no independent representations or warranties, expressed or implied, and assumes no liability in connection with the use of this information.